



ELECTRODE OVENS

PORTABLE WELDING ELECTRODE OVENS



MAINTAINS
ELECTRODE QUALITY



ROBUST AND
PORTABLE DESIGN



RANGE OF
CAPACITIES

ELECTRODE OVENS

TECHNICAL SPECIFICATIONS

MWQ-6F


6KG CAPACITY

- ▶ Integrated carrying handle for easy transportation
- ▶ Consistant electrode conditioning to help maintain welding performance
- ▶ Helps protect electrodes from moisture absorption



The Masterweld MWQ-6F electrode oven maintains a fixed temperature of 110°C, helping keep welding electrodes dry and ready for use. Its compact, portable design makes it ideal for workshop and site applications.

SPECIFICATIONS	
Model	MWQ-6F
Electrode Capacity	6kg
Temperature	110°C (fixed)
Output	0.15 kW
Supply	24VAC, 48/85VDC, 110VAC, 240VAC
Weight	3 kg
Dimensions (HxWxD) - Exterior	530 x 140x135mm
Dimensions (HxWxD) - Interior	430 x 73 x 73mm
Calibration	No

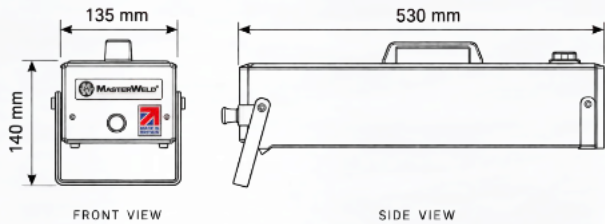

MWQ-7


7KG CAPACITY

The Masterweld MWQ-7 electrode oven helps keep welding electrodes dry and in optimum condition. Its robust construction and compact upright design make it a practical, portable solution for workshop and on-site applications.

- ▶ Precise temperature control for different electrode requirements
- ▶ Robust and Portable design ideal for both workshop and site use
- ▶ Easy-access electrode opening for convenient use



SPECIFICATIONS	
Model	MWQ-7
Electrode Capacity	7kg
Temperature	50-200°C
Output	0.3 kW
Supply	24VAC, 48/85VDC, 110VAC, 240VAC
Weight	5.5 kg
Dimensions (HxWxD) - Exterior	630 x 200 x 165mm
Dimensions (HxWxD) - Interior	473 x 93 x 73mm
Calibration	Optional

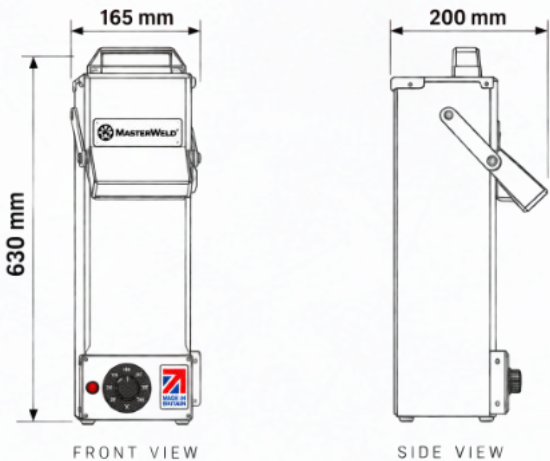

MWQ-11

11KG CAPACITY


The Masterweld MWQ-11 electrode oven helps keep welding electrodes dry and in optimum condition, reducing the risk of moisture-related welding defects. Its generous capacity makes it a practical choice for regular workshop and site use.

- ▶ Adjustable temperature control
From 50°C to 200°C
- ▶ Easy Access electrode opening
For convenient loading and removal
- ▶ Integrated carrying handle
For easy transportation



SPECIFICATIONS

Model	MWQ-11
Electrode Capacity	11kg
Temperature	50-200°C
Output	0.3 kW
Supply	24VAC, 48/85VDC, 110VAC, 240VAC
Weight	7.5 kg
Dimensions (HxWxD) - Exterior	630 x 243 x 206mm
Dimensions (HxWxD) - Interior	460 x 130 x 110mm
Calibration	Optional

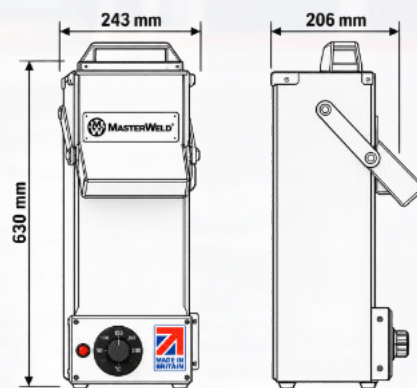

MWQ-15H

15KG CAPACITY


- ▶ Extended temperature range
- ▶ Easy-access front opening for convenient loading and removal
- ▶ Integrated carrying handle for easy transportation



The Masterweld MWQ-15H electrode oven helps keep welding electrodes dry and in optimum condition, reducing the risk of moisture-related welding defects. Its high-capacity design makes it ideal for demanding workshop and industrial applications.

SPECIFICATIONS

Model	MWQ-15H
Electrode Capacity	15kg
Temperature	50-320°C
Output	0.3 kW
Supply	Dual Voltage 110/240VAC
Weight	7.5 kg
Dimensions (HxWxD) - Exterior	610 x 260 x 175mm
Dimensions (HxWxD) - Interior	460 x 115 x 121mm
Calibration	Optional

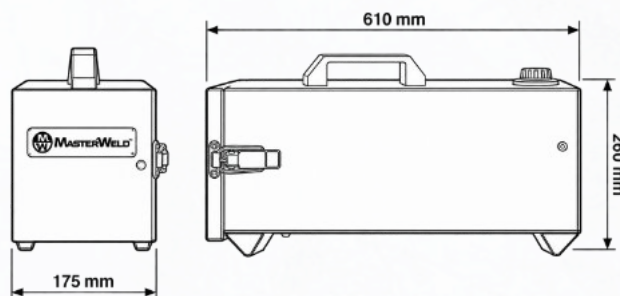



GLOBAL SUPPLY

FROM THE UK TO CUSTOMERS WORLDWIDE



BRITISH MANUFACTURING. GLOBAL DISTRIBUTION. SINCE 1994



**EXPLORE THE
RANGE**

Scan to view



AES Group,
Olympic House, Collett, Southmead Park,
Didcot, OX11 7WB



Certificate No. 13319

Masterweld® is a registered trademark of AES Manufacturing and Distribution Ltd t/a AES Group