



ELECTRODE OVENS

STATIONARY WELDING ELECTRODE OVENS



PRECISE TEMPERATURE
CONTROL



ROBUST INDUSTRIAL
DESIGN



RANGE OF
CAPACITIES

AES
GROUP

BRITISH MANUFACTURING · GLOBAL DISTRIBUTION · SINCE 1994

STATIONARY DRYING OVENS


TECHNICAL SPECIFICATIONS

MWR-50D / MWR-50T


50KG CAPACITY



SPECIFICATION	MWR-50D	MWR-50T
Electrode Capacity	50kg	
Temperature	50-320°C	Ambient - 400°C
Control	Thermostat	Digital
Output	0.75 kW	1.05kW
Supply	110VAC / 240VAC	
Weight	18 kg	
Dimensions (HxWxD) - Exterior	330 x 410 x 550mm	
Dimensions (HxWxD) - Interior	250 x 250 x 480mm	
Calibration	Optional	Included as Standard



FRONT VIEW

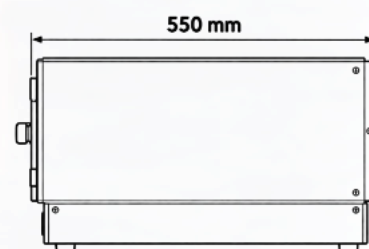


SIDE VIEW

MWR-150T / MWR-150D


150KG CAPACITY



SPECIFICATION	MWR-150T	MWR-150D
Electrode Capacity	150kg	
Temperature	50-320°C	Ambient - 320°C
Control	Thermostat	Digital
Output	1.5kW	
Supply	110VAC / 240VAC	
Weight	39 kg	
Dimensions (HxWxD) - Exterior	530 x 620 x 620mm	
Dimensions (HxWxD) - Interior	470 x 470 x 480mm	
Calibration	Optional	Included as Standard



FRONT VIEW



SIDE VIEW

STATIONARY DRYING OVENS


TECHNICAL SPECIFICATIONS

MWR-150DH

150KG CAPACITY



SPECIFICATION	MWR-150DH
Electrode Capacity	150kg
Temperature	Ambient-400°C
Control	Digital
Output	2.25kW
Supply	110VAC / 240VAC
Weight	39 kg
Dimensions (HxWxD) - Exterior	530 x 620 x 620mm
Dimensions (HxWxD) - Interior	470 x 470 x 480mm
Calibration	Included as Standard

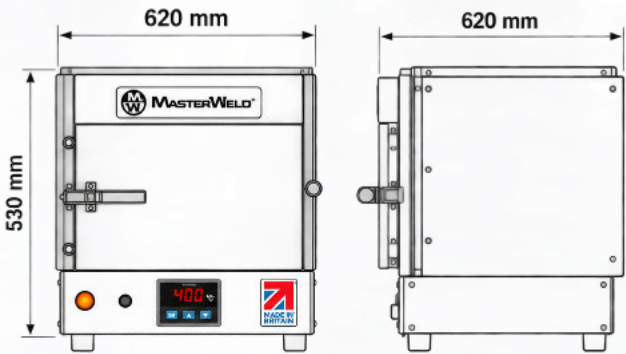


MWR-150H

150KG CAPACITY



SPECIFICATION	MWR-150DH
Electrode Capacity	150kg
Temperature	Ambient-500°C
Control	Digital
Output	3kW
Supply	110VAC / 240VAC
Weight	69 kg
Dimensions (HxWxD) - Exterior	600 x 780 x 685mm
Dimensions (HxWxD) - Interior	470 x 470 x 480mm
Calibration	Included as Standard

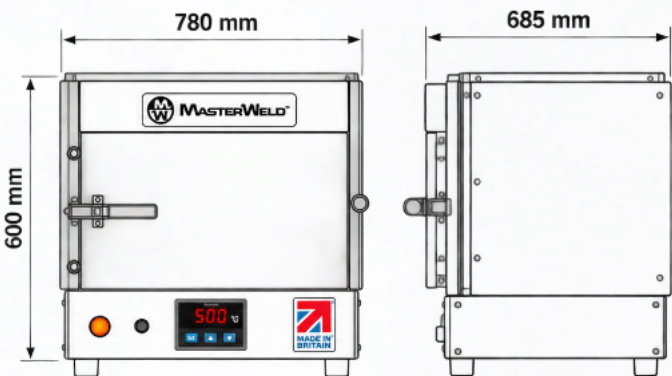

STATIONARY DRYING OVENS



TECHNICAL SPECIFICATIONS

MWR-200H

200KG CAPACITY



SPECIFICATION	MWR-200H
Electrode Capacity	200kg
Temperature	Ambient-500°C
Control	Digital
Output	4.5kW, 3kW
Supply	110VAC / 240VAC / 380VAC
Weight	75 kg
Dimensions (HxWxD) - Exterior	575 x 675 x 885mm
Dimensions (HxWxD) - Interior	465 x 480 x 580mm
Calibration	Included as Standard

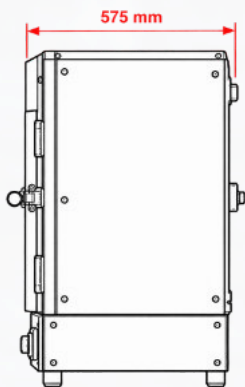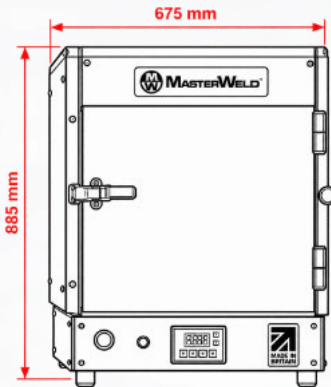


MWR-225DV / MWR-225DS


225KG CAPACITY



SPECIFICATION	MWR-225D	MWR-225DS
Electrode Capacity	225kg	
Type	Ventilated	Static
Temperature	Ambient-400°C	Ambient - 500°C
Control	Digital	
Output	4.7kW	
Supply	380VAC	
Weight	155 kg	152kg
Dimensions (HxWxD) - Exterior	880 x 760 x 1030mm	
Dimensions (HxWxD) - Interior	740 x 530 x 470mm	
Calibration	Included as Standard	



FRONT VIEW



SIDE VIEW

STATIONARY DRYING OVENS



TECHNICAL SPECIFICATIONS

MWR-450DS / MWR450DV

450KG CAPACITY



SPECIFICATION	MWR-450DS	MWR-450DV
Electrode Capacity	450kg	
Temperature	Ambient - 400°C	
Type	Static	Ventilated
Control	Digital	
Output	9.4kW	
Supply	380VAC	
Weight	214kg	217kg
Dimensions (HxWxD) - Exterior	880 x 760 x 1450mm	
Dimensions (HxWxD) - Interior	740 x 530 x 890mm	
Calibration	Included as Standard	





MWR-650DS / MWR-650DV

150KG CAPACITY



SPECIFICATION	MWR-650DS	MWR-650DV
Electrode Capacity	650kg	
Temperature	Ambient - 400°C	
Type	Static	Ventilated
Control	Digital	
Output	13.5kW	
Supply	380VAC	
Weight	273 kg	276 kg
Dimensions (HxWxD) - Exterior	880 x 760 x 1855mm	
Dimensions (HxWxD) - Interior	740 x 530 x 1330mm	
Calibration	Included as Standard	





GLOBAL SUPPLY

FROM THE UK TO CUSTOMERS WORLDWIDE



BRITISH MANUFACTURING. GLOBAL DISTRIBUTION. SINCE 1994



**EXPLORE THE
RANGE**

Scan to view



AES Group,
Olympic House, Collett, Southmead Park,
Didcot, OX11 7WB



Certificate No. 13319

Masterweld® is a registered trademark of AES Manufacturing and Distribution Ltd t/a AES Group