



SUBMERGED ARC WELDING FLUX OVENS

PRECISION FLUX DRYING & CONDITIONING



DIGITAL TEMPERATURE
CONTROL



80 - 400KG
CAPACITY



SINGLE & DUAL TANK
OPTIONS


SUBMERGED ARC FLUX OVENS

TECHNICAL SPECIFICATIONS

MWF-80D

80KG CAPACITY | SINGLE TANK


SPECIFICATIONS	
Capacity	80kg
Temperature	Ambient - 370°C
Output	4 kW
Supply	380 V AC
Dimensions (WxDxH) - Exterior	660 x 690 x 1320mm

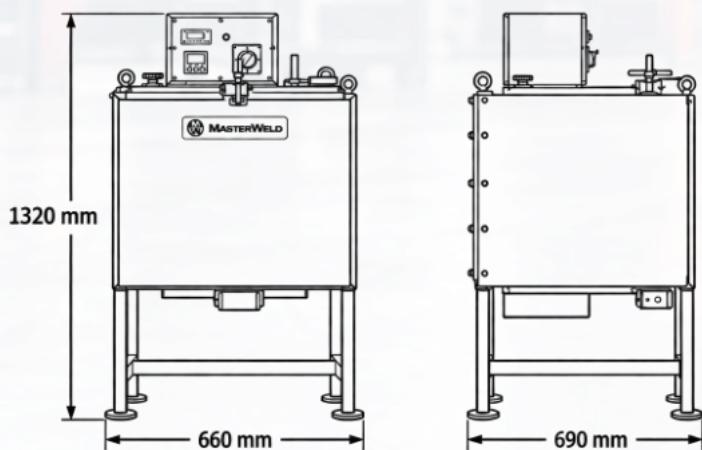

MWF-200D

200KG CAPACITY | SINGLE TANK


SPECIFICATIONS	
Capacity	200kg
Temperature	Ambient - 370°C
Output	6.6 kW
Supply	380 V AC
Dimensions (WxDxH) - Exterior	780 x 790 x 1420mm

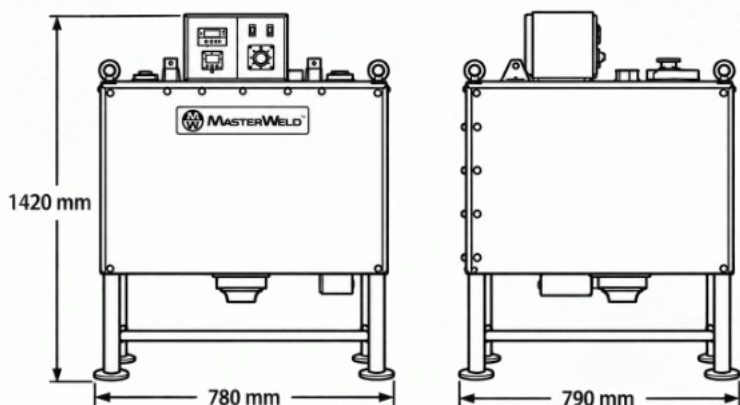

MWF-400DD

400KG CAPACITY | DUAL TANK


SPECIFICATIONS	
Capacity	400kg
Temperature	Ambient - 370°C
Output	13.2 kW
Controller	Dual Controller
Supply	380 V AC
Dimensions (WxDxH) - Exterior	1560 x 790 x 1420mm

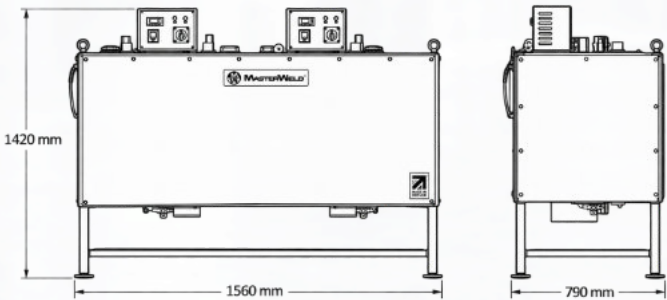

MWF-400DT

400KG CAPACITY | DUAL TANK

SPECIFICATIONS	
Capacity	400kg
Temperature	Ambient - 370°C
Output	13.2 kW
Controller	Single Controller
Supply	380 V AC
Dimensions (WxDxH) - Exterior	1560 x 790 x 1420mm

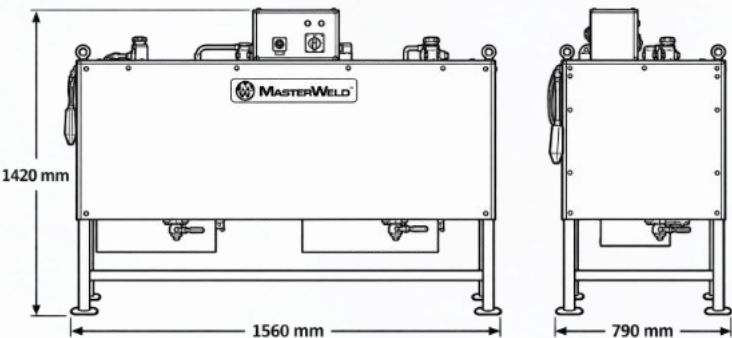



GLOBAL SUPPLY

FROM THE UK TO CUSTOMERS WORLDWIDE



BRITISH MANUFACTURING. GLOBAL DISTRIBUTION. SINCE 1994



**EXPLORE THE
RANGE**

Scan to view



AES Group,
Olympic House, Collett, Southmead Park,
Didcot, OX11 7WB



Certificate No. 13319

Masterweld® is a registered trademark of AES Manufacturing and Distribution Ltd t/a AES Group